

**EXPERT IN
SEALING SOLUTIONS**



**HYDRAULIC
& PNEUMATIC
SEALING**



A WIDE RANGE

ROTARY
HYDRAULIC
PNEUMATIC
ASEPTIC
MACHINED PARTS

EXPRESS DELIVERY

24/48H

TECHNICAL SUPPORT

ADVISES, HELPS AND
PROVIDES YOU TECHNICAL
ASSISTANCE!

SUMMARY



TECHNICAL DESCRIPTION

6

HYDRAULIC SEALS

9

WIPERS

9

ROD SEALS

13

PISTON SEALS

17

PNEUMATIC SEALS

22

GUIDING COMPONENTS

24



**SEAL MANUFACTURER
AND SUPPLIER**

FOR ALL INDUSTRIES

**EXPERT IN
SEALING PRODUCTS
FOR MORE THAN 25 YEARS**

SEAL France has specialised in the manufacture and marketing of standard sealing and custom-made products. SEAL France is present in France and abroad. Expertise and technical skills are our strength that we want to put at the service of our customers.

MARKET EXPERTISE

FOOD AND BEVERAGE



PHARMACEUTICAL



HYDRAULIC



PETROCHEMISTRY



AEROSPACE



ENERGY



5 RANGES

+ 70 000 REFERENCES

FOR ANY TYPE OF SEALING



FEATURES

The choice for the good sealing component is fundamental, it is according to the following elements:

- › Working pressure expressed in bar (1Mpa= 10 Bar).
(the information are indicated according to the permissible or recommended gap).
- › Peak and operating temperature (expressed in C°).
- › Speed operating (expressed in trs/mn or meter per second m/s for the rotation and in meter per second for the linear speed.
- › Nature of the fluid to be sealed.
- › Frequency of use.
- › Machining tolerance.
- › Surface finish (roughness RA μm).

MATERIALS

The most used materials for the fabrication of the sealing components are:

- › NBR - Nitrile Butadiene Rubber.
- › FPM or FKM - Fluorocarbon rubber.
- › AU - Polyurethane.
- › PTFE - Polytetrafluoroethylene.
- › POM - Acetal resin.

The table below informs you of the temperature range and how the materials outlined may be used according to your choice.

TABLEAU 1 – ELASTOMER OPERATING TEMPERATURE

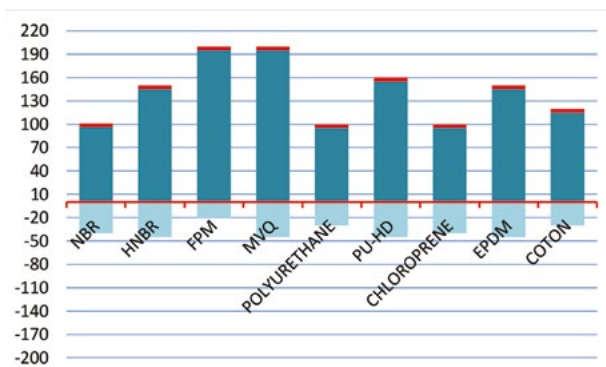
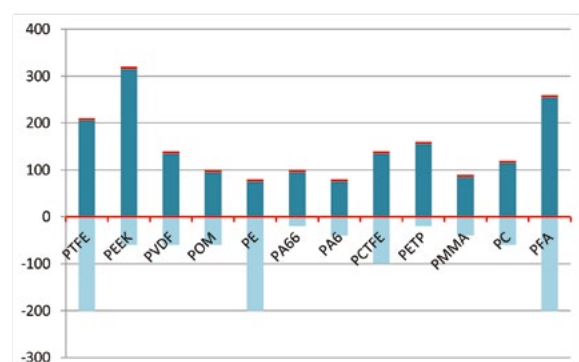


TABLEAU 2 – PLASTIC OPERATING TEMPERATURE






ABBREVIATION	MATERIAL	NAME	TEMPERATURE
NR	Rubber	Natural	-55°C to +80°C
IR	Rubber	Synthetic Isoprene	-55°C to +90°C
SBR	Rubber	Styrene butadiene rubber	-50°C to +100°C
IIR	Rubber	Butyl rubber	-30°C to +150°C
CIIR	Rubber	Chlorobutyl rubber	-50°C to +150°C
EPM	Rubber	Propylene	-50°C to +130°C
EPDM	Rubber	Ethylene Propylene Diene Monomer	-50°C to +150°C
NBR	Rubber	Nitrile butadiene rubber	-40°C to +100°C
HNBR	Rubber	Hydrogenated nitrile	-25°C to +150°C
CR	Rubber	Polychloroprene	-40°C to +100°C
ACM	Rubber	Acrylic/Ethylene Copolymer	-20°C to +150°C
FPM	Rubber	Fluorocarbon rubber	-20°C to +200°C
FFPM	Rubber	Perfluorocarbon rubber	-15°C to +300°C
VMQ	Rubber	Silicone (methyl vinyl)	-60°C to +250°C
FMQ	Rubber	Silicone (methyl fluor)	-60°C to +210°C
AU	Rubber	Polyurethane	-30°C to +95°C
EU	Rubber	Polyurethane	-30°C to +95°C
ECO	Rubber	Copolymer of epichlorohydrin	-40°C to +120°C
AEM	Rubber	Ethylene-acrylate rubber	-30°C to +150°C

Material	Abbreviation	Name	Density	Temperature range in C°	Coefficient of thermal expansion 10(-5) XC°-1	Classification UL 94	Tensile strength N/mm2	Flexural strength N/mm2	Hardness shore Rockwell	Coefficient of friction (COF)
Polyamide 6	PA6	NYLON® 6/ERTALON 6 SA®	1,14	-40 85	9	HB	60	55	D74	0,25 - 0,50
Polyamide 6/6	PA6/6	NYLON® 6/ERTALON 6 SA®	1,14	-30 95	7	HB	70	60	D80	0,25 - 0,50
Cast Polyamide	PA6/6	Cast NYLON®	1,15	-30 105	8	HB	65	60	D80	0,25 - 0,50
Glass-filled Polyamide	PA6/6 GF 30	Glass-filled NYLON®	1,40	-20 120	3	HB	150	200	D75	0,30 - 0,50
Oil filled Polyamide	PA6 + Oil	Oil filled NYLON®	1,35	-20 105	8	HB	70	80	M82	0,15 - 0,25
Polyamide 12	PA12	RILSAN®	1,06	-50 70	9	V2	40	50	D74	0,25
Polyacetal	POM C	DELIRIN®	1,42	-50 115	8	HB	70	110	D74	0,25
Polyvinyl Chloride	PVC		1,45	-20 60	8	-	50	80	D78	0,25 - 0,50
Polyethylene	PEHD		0,94	-50 80	18	HB	24	-	D60	0,20
Polyethylene 500	PEHD 500		0,94	-100 80	18	HB	28	40	D66	0,15
Polyethylene 1000	PEHD 1000		0,95	-260 90	18	HB	22	27	D62	0,12
Polyethylene 6000	PEHD 6000	CESTIDUR®	0,93	-269 90	18	HB	-	-	D62	0,12
Polyethylene Terephthalate	PETP		1,38	-20 115	7	HB	75	120	D84	0,20
Copolymer Polypropylene	PPC		0,92	-10 100	11	HB	31	40	D70	0,30
Polytetrafluorethylene	PTFE	TEFLON®	2,10	-200 200	12	VO	35	160	D50	0,10
Poyetherethercethone	PEEK		1,31	-60 250	5	VO	92	170	D86	0,30
Copolymer Perfluoroalkoxyethylene *	PFA									

Non exhaustive list, these are guide values and could not engage the responsibility of Seal France.

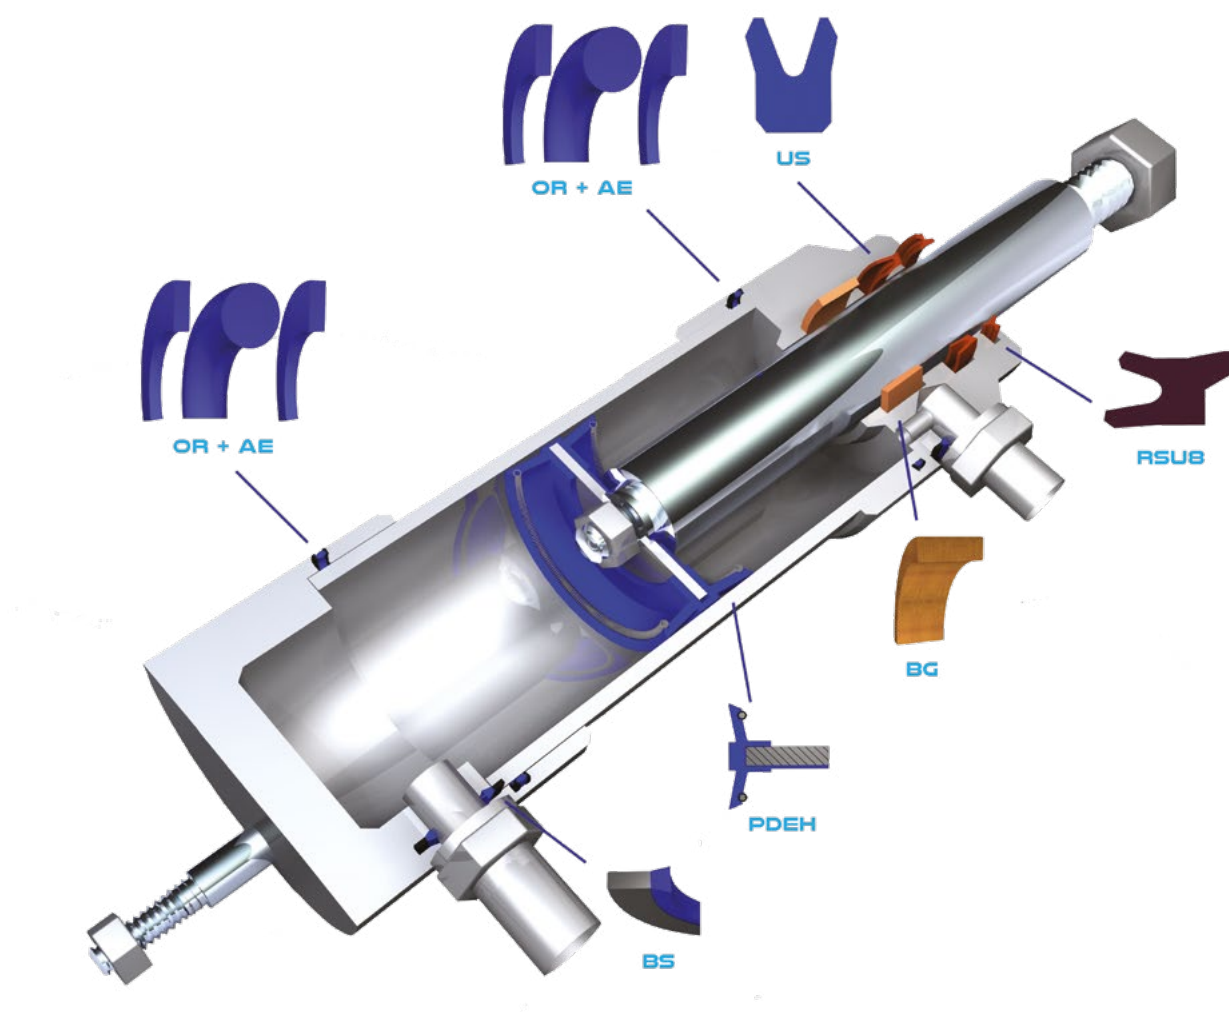
PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	RS	PU	-30°C +95°C	...	0,5
	RS	NBR	-30°C +100°C	...	0,5
	RS1	PU	-30°C +95°C	...	0,5
	RS1	NBR	-30°C +100°C	...	0,5
	RSK	PU	-30°C +95°C	...	0,5
	RSK	NBR	-30°C +100°C	...	0,5
	RST	PU	-30°C +95°C	...	0,5
	RST	NBR	-30°C +100°C	...	0,5
	RS6	PU	-30°C +95°C	...	0,5
	RS5	PU	-30°C +95°C	...	0,5

PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	RWB	NBR	-30°C +100°C	...	0,5
	RW1	NBR	-30°C +100°C	...	0,5
	RSU8	PU	-30°C +95°C	10	0,5
	RSU8	NBR	-30°C +100°C	10	0,5
	CHA	NBR	-30°C +100°C	1	0,5
	CHAF	PU	-30°C +95°C	2	0,5
	CHAF	NBR	-30°C +100°C	1	0,5
	CHAR	NBR SPRING	-30°C +100°C	10	0,5
	A17	PU	-30°C +95°C	10	1
	A17	NBR	-30°C +100°C	10	1


PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	RW	PA12	-50°C +70°C	...	4
	RM	NBR STEEL	-30°C +100°C	...	0,5
	RMN	PU (Steel insert inside the product)	-30°C +95°C	...	0,5
	RMN	NBR (Steel insert inside the product)	-30°C +100°C	...	0,5
	RM	PU STEEL	-30°C +95°C	...	0,5
	RMU	PU STEEL	-30°C +95°C	...	0,5
	RU	PU STEEL	-30°C +95°C	...	0,5
	RCT	PTFE O-RING NBR	-30°C +110°C (*)	...	15
	RCT2	PTFE O-RING NBR	-30°C +110°C (*)	...	15
	RCT5	PTFE O-RING NBR	-30°C +110°C (*)	...	15


PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	RCT500	PTFE NBR	-30°C +110°C (*)	...	0,5
	RCTD	PTFE NBR	-30°C +110°C (*)	...	0,5
	RWS	NBR BRASS STEEL	-40°C +120°C	10	0,5

(*) Temperature -30°C +200°C with OR. FPM.





SINGLE ACTING - CLOSED HOUSING

PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	US	PU	-30°C +95°C	400	0,5
	UT	PU	-30°C +95°C	400	0,5
	UTL	PU	-30°C +95°C	400	0,5
	UTLI	PU POM	-30°C +95°C	500	0,5
	UTS	PU	-30°C +95°C	400	0,5
	UTSL	PU	-30°C +95°C	400	0,5
	UTSLI	PU POM	-30°C +95°C	500	0,5
	UTO	PU NBR	-30°C +95°C	400	0,5
	UTOS	PU NBR	-30°C +95°C	400	0,5
	UTOP	PU NBR	-30°C +95°C	400	0,5

PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	UTOI	PU POM NBR	-30°C +95°C	500	0,5
	UTQ	PU NBR	-30°C +95°C	400	0,5
	UTQI	PU POM NBR	-30°C +95°C	500	0,5
	UBR	PU	-30°C +95°C	400	0,5
	UBRI	PU POM	-30°C +95°C	500	0,5
	UT320	PU POM	-30°C +95°C	500	0,5
	UT621	PU POM NBR	-30°C +95°C	500	0,5
	BGO	NBR FABRIC	-30°C +110°C	250	0,5
	BH	NBR FABRIC	-30°C +110°C	220	0,5
	BHI	NBR FABRIC	-30°C +110°C	400	0,5

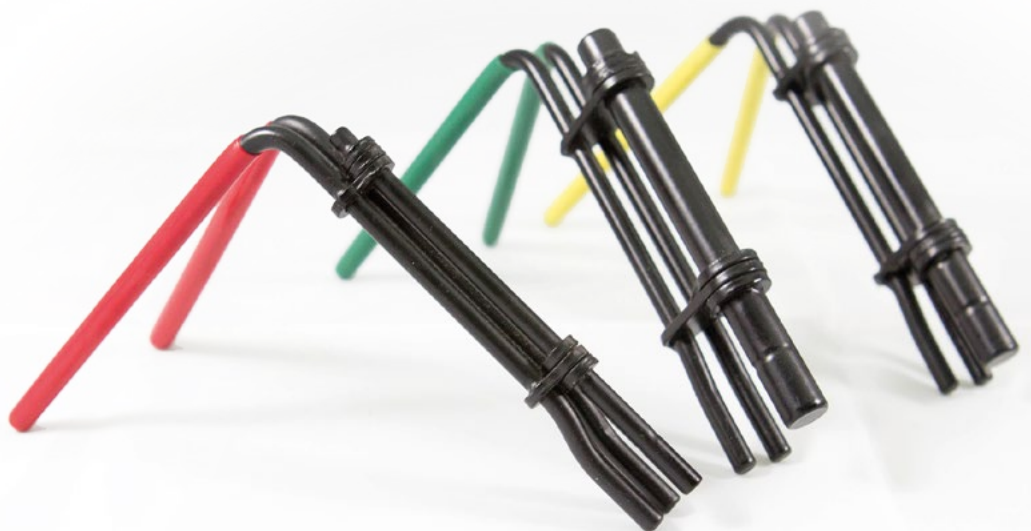
SINGLE ACTING - CLOSED HOUSING

PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	BQ2	NBR FABRIC	-30°C +110°C	250	0,5
	BH3	NBR FABRIC	-30°C +110°C	250	2
	BH18	NBR FABRIC	-30°C +110°C	500	0,15
	BH19	NBR FABRIC POM	-30°C +110°C	600	0,15
	BH15	NBR FABRIC	-30°C +110°C	300	0,15
	CTSE	NBR O-RING FABRIC	-30°C +110°C (*)	500	15

(*) Temperature -30°C +200°C with OR. FPM.



MOUNTING PLIER FOR U SEAL



COMPOSITE SERIE - DOUBLE ACTING - CLOSED HOUSING







PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	CTDE	PTFE NBR	-30°C +110°C (*)	500	15
	CFMI	PTFE NBR	-30°C +110°C (*)	400	0,4
	CRT	PTFE NBR	-30°C +110°C (*)	400	15
	CRTS	PTFE CARBON NBR	-30°C +110°C (*)	320	1
	JCF	PA6 NBR	-20°C +100°C	400	0,8











(*) Temperature -30°C +200°C with OR. FPM.

ROD PACKING / SINGLE ACTING - OPEN HOUSING







	CH5	NBR FABRIC	-30°C +110°C	500	0,5
	CH7	NBR FABRIC	-30°C +110°C	500	0,5
	PSE	NBR FABRIC POM	-30°C +110°C	700	0,5


SINGLE ACTING - OPEN HOUSING AND CLOSED HOUSING



PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	UP	PU	-30°C +95°C	400	0,5
	US	PU	-30°C +95°C	400	0,5
	UPW	PU POM	-30°C +95°C	500	0,5
	UPI	PU POM	-30°C +95°C	400	0,5
	UPI	NBR POM	-30°C +100°C	250	0,5
	UP18	PU POM	-30°C +95°C	400	0,5
	UP18	NBR POM	-30°C +100°C	250	0,5
	PR (Retaining clips)	POM			
	BW	NBR FABRIC POM	-30°C +110°C	400	0,5
	BGU	NBR FABRIC	-30°C +110°C	700	0,5
	PNG	NBR FABRIC POM	-30°C +110°C	250	0,5

PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	SFD	NBR FABRIC	-30°C +110°C	700	0,5
	C18	NBR FABRIC	-30°C +110°C	700	1
	CH3	NBR FABRIC	-30°C +110°C	400	0,5
	CPSE	NBR PTFE	-30°C +110°C (*)	500	15
	CAL H	PU	-30°C +95°C	12	0,5
	CAL	NBR FABRIC	-30°C +110°C	250	0,5
	CAL	NBR	-30°C +100°C	10	0,5
	CALT	PU	-30°C +95°C	12	0,5
	CALR	NBR SPRING	-30°C +100°C	10	0,5
	CALR	PU SPRING	-30°C +95°C	12	0,5




(*) Temperature -30°C +200°C with OR. FPM.




PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	JPM JPL JPSJ JPSG	NBR PE POM	-30°C +100°C	400	0,5
	JPM AI	NBR PE POM	-30°C +100°C	400	0,5
	JSM ≥ 50 MM	NBR FABRIC POM	-30°C +100°C	400	0,5
	JSM2 ≤ 50 MM	NBR FABRIC POM	-30°C +100°C	500	0,5
	JP64	NBR PE	-30°C +100°C	400	0,5
	JTDE JPW	NBR FABRIC POM	-30°C +100°C	400	0,5
	JTDE AI	NBR FABRIC PE	-30°C +100°C	500	0,5
	JPWL	NBR FABRIC POM	-30°C +100°C	400	0,5
	JP50	NBR PE	-30°C +100°C	400	0,5
	JP58 AI	NBR FABRIC POM	-30°C +110°C	400	0,5

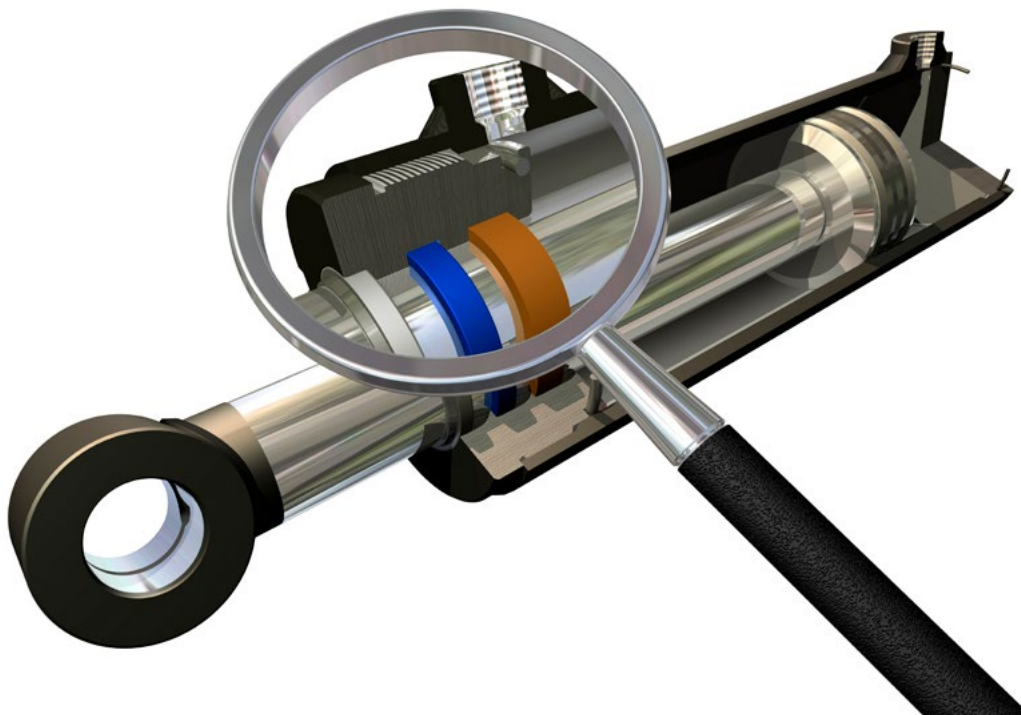
PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	JPDE	NBR FABRIC POM	-30°C +100°C	700	0,5
	JP56	NBR FABRIC	-30°C +100°C	300	0,5
	JP65	NBR POM	-30°C +100°C	140	0,5
	JTR	NBR POM	-30°C +100°C	400	0,5
	JPU4	NBR POM PU	-30°C +100°C	400	0,5
	JPHD	NBR POM PTFE	-30°C +100°C	500	0,5
	JPSW	NBR PTFE	-30°C +100°C	500	1,5
	PGU	NBR PU	-30°C +95°C	320	0,5
	PGU AI	NBR PU POM	-30°C +95°C	400	1
	CRPS	NBR PTFE	-40°C +100°C (*)	500	15

PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	CPDE	NBR PTFE	-40°C +100°C (*)	500	16
	CFMA	NBR PTFE	-40°C +100°C (*)	400	0,4
	JCM	PA6 NBR	-20°C +100°C	400	0,8
	CRP	NBR PTFE	-30°C +100°C (*)	350	15
	CPS	NBR PU	-40°C +100°C	250	0,8
	CPO	NBR PU	-40°C +95°C	250	0,8
	CPDE AI	NBR PTFE POM	-30°C +100°C (*)	400	1,5
	CPQ	NBR PTFE	-30°C +100°C (*)	400	2
	CPQ5	NBR PTFE	-30°C +100°C (*)	600	3
	PDEH	NBR STEEL SPRING	-30°C +100°C	40	0,25

(*) Temperature -30°C +200°C avec OR. FPM.

PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	RUP	NBR	-30°C +100°C	16	1
	RUD	PU	-30°C +95°C	12	1
	RUE	PU	-30°C +95°C	12	1
	RAP	NBR	-30°C +100°C	16	2
	RAH	PU	-30°C +95°C	16	2
	USN	NBR	-30°C +100°C	120	0,25
	USM	NBR	-30°C +100°C	120	0,25
	UTN	NBR	-30°C +100°C	80	0,25
	UPN	NBR	-30°C +100°C	120	0,25
	PDEP + STEEL	NBR	-30°C +100°C	10	1

PROFILE	DESIGNATION	MATERIAL	TEMPERATURE	PRESSURE (BAR)	V (M/S)
	SPK	NBR	-20°C +100°C	12	1
	SPR	NBR	-20°C +100°C	12	1
	PZ	NBR	-20°C +100°C	16	1
	CL	NBR	-30°C +100°C	10	0,5
	SKD	NBR	-20°C +100°C	10	1
	PPDUO	NBR STEEL	-20°C +100°C	10	10



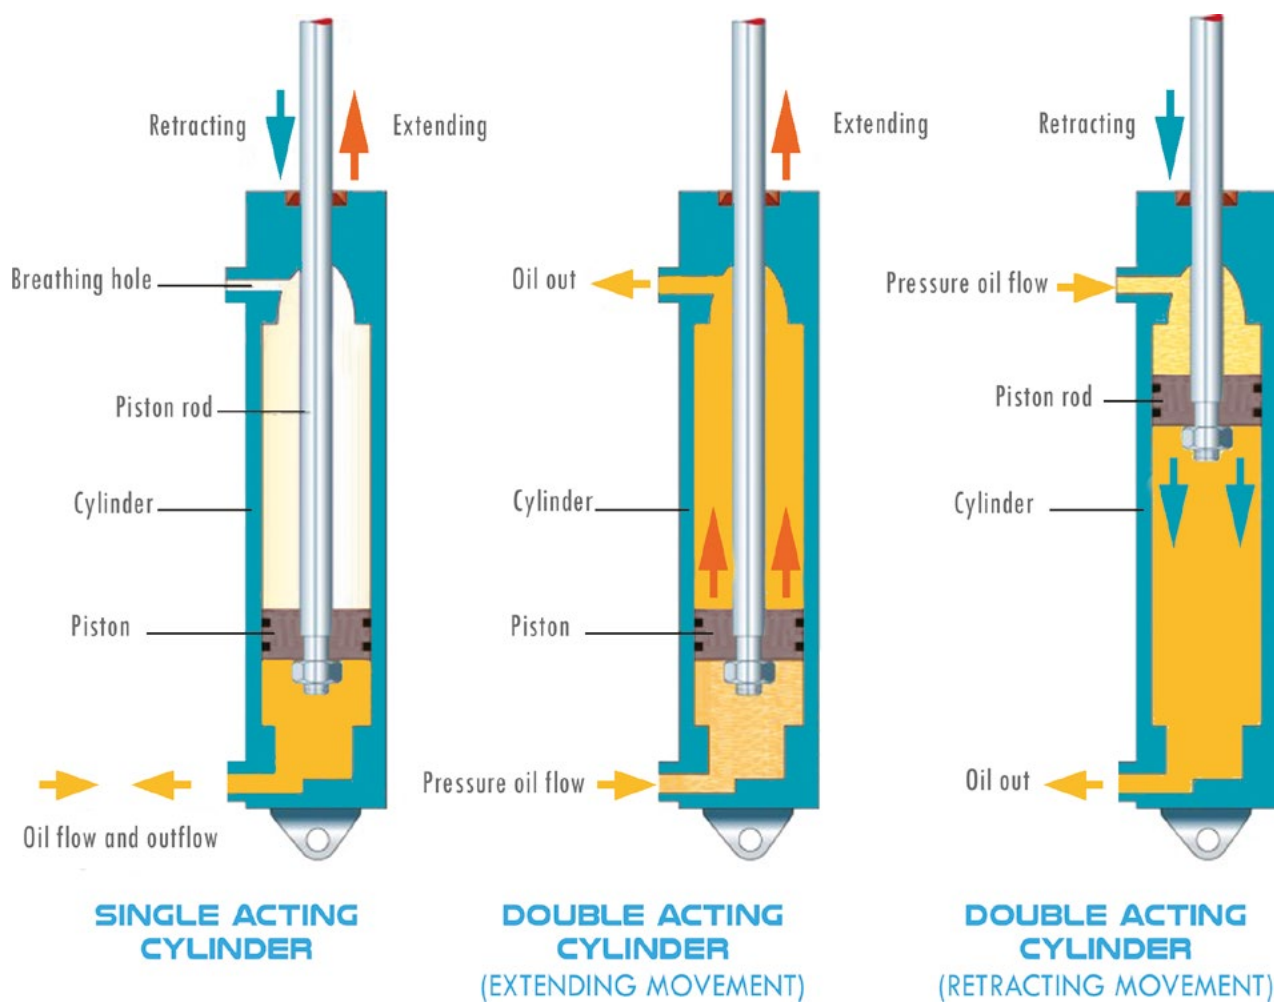
PROFILE	DESIGNATION	MATERIAL	DESCRIPTIVE	TEMPERATURE	V (M/S)
	BGCG	CARBON GRAPHITE-FILLED PTFE	Guiding tape (In meters)	-40°C +200°C	15
	SGCG	CARBON GRAPHITE-FILLED PTFE	Machined or preform wear rings	-40°C +200°C	15
	BGA	ACETAL RESIN	Machined or preform wear rings	-30°C +100°C	0,5
	SGA	ACETAL RESIN	Machined or preform wear rings	-30°C +100°C	0,5
	BGRP	IMPREGNATED POLYESTER RESIN	Guiding tape (In meters)	-30°C +120°C	1
	SGRP	IMPREGNATED POLYESTER RESIN	Machined or preform wear rings	-30°C +120°C	1
	BG	PTFE FILLED BRONZE 40%	Guiding tape (In meters)	-40°C +200°C	15
	SGP	PTFE FILLED BRONZE 40%	Machined or preform wear rings	-40°C +200°C	15
	BG3	PTFE FILLED BRONZE 40%	Machined wear rings	-40°C +200°C	...
	BG4	PTFE FILLED BRONZE 40%	Machined wear rings	-40°C +200°C	...

PROFILE	DESIGNATION	MATERIAL	DESCRIPTIVE	TEMPERATURE	V (M/S)
	SG5	PTFE FILLED BRONZE 40%	Machined wear rings	-40°C +200°C	...
	SG6	PTFE FILLED BRONZE 40%	Machined wear rings	-40°C +200°C	...
	SG7	PTFE FILLED BRONZE 40%	Machined wear rings	-40°C +200°C	...
	SG8	PTFE FILLED BRONZE 40%	Machined wear rings	-40°C +200°C	...

**STRAIGHT
CUT****ANGLE
CUT****STEP
CUT**

All the guiding components are available in different materials as virgin PTFE, filled PTFE, Glass fiber filled PTFE and Mos2, Carbon, Graphite, POM, Polyamide, PEEK...

On request, others types of cuts (guiding band, wear rings, straight cut, angle cut of 45° or step cut...) can be made according to customer's specification.



The information and the technical characteristics mentioned in our catalogue are average values and subjected to change without prior notice.

These are guide values and subjected to change without prior notice. It is not a guarantee and we recommend you to make a test, before the final application.

Date: __ / __ / __ Compagny:..... Customer:..... AccountN°:.....

Name:..... Position:.....

Phone:

Current need :

Annual need :

TYPE OF ASSEMBLY

Assembly: Piston ☐ Rod ☐ Other ☐
Sealing: Single acting ☐ Double acting ☐
Housing: Open ☐ Closed ☐

APPLICATION

Hydraulic ☐ Pneumatic ☐
 New ☐ Replacement ☐

MOVEMENT

Alternative ☐ Rotative ☐ Oscillating ☐ Static ☐ Facial ☐
 Speed linear: (m/s) Stroke length: min..... max.....
 Rotative speed: (trs/mn) Cycle number: (mn)

TEMPERATURE

Continue: (°C) Peak: (°C)

FLUIDS IN CONTACT (INSIDE)

Type:.....

AMBIANT ENVIRONMENT (OUTSIDE)

Type:.....

Working pressure: Bar (10 Bar = 1 Mpa)

COMMENTS:

By post: Seal France, 67 rue Ettore Bugatti - 66000 Perpignan - France

Email address: contact@sealfrance.fr

Can't find what you're looking for?

CONTACT US!

**SEAL FRANCE IS SPECIALIZED
IN CUSTOM-MADE SEALING SOLUTIONS!**

SEAL FRANCE

Espace Polygone, 67 rue Ettore BUGATTI
66000 PERPIGNAN
FRANCE

 +33 (0)4 68 52 91 91

 +33 (0)4 68 52 91 90

 contact@sealfrance.fr



@seal-france

seal-france.fr



SEALFRANCE
SEALING SOLUTIONS

GROUPE

efire